

# AcuSplitCT Series 300/400/600A Split Core Current Transformer

The Accuenergy split core CTs are compact and low-cost current transformers with high accuracy. The Split Core CTs are ideal for quick and easy installation without disconnecting cables during installation. The internal precision burden resistor across the secondary winding of the CT provides a safe low voltage output and permits safe opening of the secondary.

## FEATURES

- Clamp-on design, easy installations
- 333mV output, safe installations
- Most cost-effective

## SPECIFICATIONS

Rated Primary Current	300A, 400A, 600A
Rated Secondary Current	333mV
Linearity Accuracy	0.5% (at 10%-130%)
Lead	8'(2.5m), twisted pair, White-Positive, Brown-Negative Bare-Shield, 22AWG
Insulation Voltage	600Vac, Category III
Frequency range	50/60Hz
Withstand Voltage	3,000Vac
Standard	IEC 60044-1
Certification	UR, CE approved & RoHS compliant
Construction	Epoxy encapsulated housing

## ORDERING INFORMATION

Ordering Number:	Rated Input	
AcuCT- 125 -		: 333
Ordering Example: AcuCT- 125 -	400	: 333
	300: 300A	
	400: 400A	
	600: 400A	



**Accuenergy Corp.**

Los Angeles - Toronto - Beijing - Pretoria


North America Toll Free: 1-877-721-8908

Web: [www.accuenergy.com](http://www.accuenergy.com)

Email: [marketing@accuenergy.com](mailto:marketing@accuenergy.com)



## DIMENSIONS

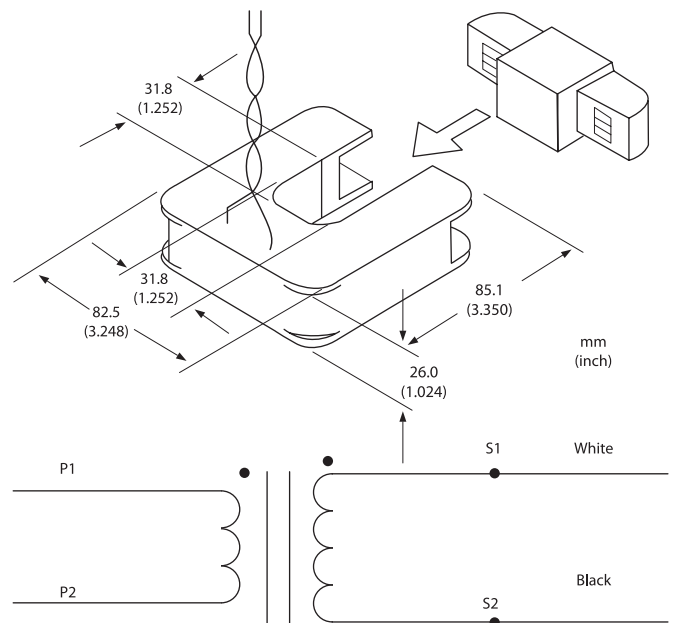

**ACCUENERGY**  
Your Power and Automation Partner